TPOD Storage Full Flash



😂 ITPOD

Intelligent Storage Systems

for your digital future


itpod.com

Nowadays, when information is of great importance, Data Storage Systems (DSS) have become an integral part of any enterprise. The requirements for new systems are becoming more and more stringent due to the constant development of technology and the increasing amount of information that needs to be processed. This leads to an increase in software system requirements including compatibility, operability and processing power.

ITPOD Storage Full Flash (FF) is a line of modern classic storage systems for converged IT infrastructures. These high-performance storage systems are ideal for organizations dealing with large volumes of information, data analytics, cloud technology and multimedia files. Information is stored on reliable and high-speed NVMe SSD drives, and the systems offer high-speed performance, minimal latency and efficient utilization of multi-core processor resources. They are optimal for tasks that require fast response of the disk subsystem and stable operation under high loads.

ITPOD Storage systems are fault tolerant for up to three drives and support transactional integrity and automatic data recovery. All key components are redundant, ensuring continuous operation. And an intuitive, graphical web interface makes it easy to manage your storage resources.

When building our storage solutions, we carefully selected hardware components, implemented innovative software solutions, and worked hard to create high-quality storage. Thanks to our teamwork, we have created systems that deliver high performance, stability, and storage efficiency.

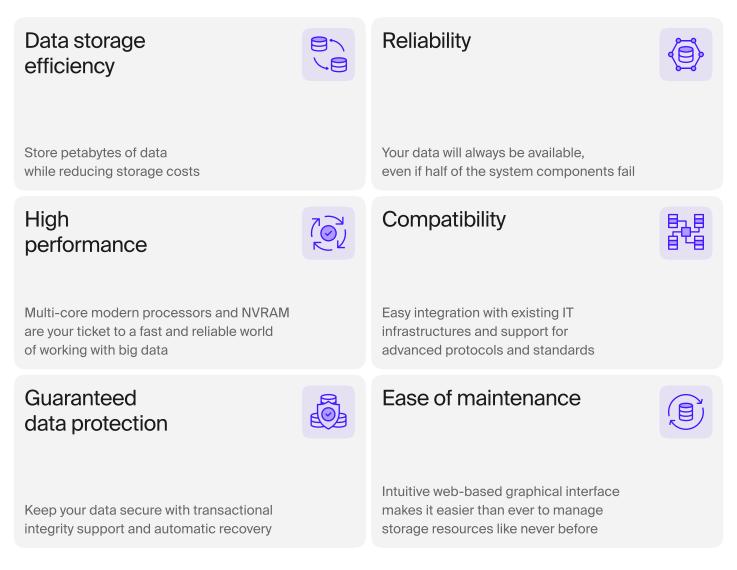



Dimensions		Operating conditions		
Disk Shelf: 2U (24 x 2.5" NVMe SSD U.2)		Installation in a standard 19" rack, up to 1 meter deep		
Weight (including one disk shelf): 80 kg		Power consumption from 2000W (depending on the fill)		
Controllers: 2 x 2U, D: 748mm x W: 433.4mm x H: 87.6mm		Operation at temperatures from 10° to 35°C and relative humidity between 30% and 80% (without air condensation)		
Technical specifications		ITPOD FF-100	ITPOD FF-300	ITPOD FF-500
Class of equipment		Entry	Midrange	High End
Performance (IOPS)		400 000	600 000	1 000 000
Operating mode		Active-Active		
Memory (per system)		512 GB	1024 GB	1536 GB
🖶 NVRAM (per system)		64 GB		
Maximum number of drives		24	48	72
🔗 Maximum unplaced space		up to 737 TB	up to 1.47 PB	up to 2.2 PB
O Efficient space		up to 2.2 PB	up to 4.4 PB	up to 6.6 PB
Supported drives (TLC NVMe)		3.2TB, 6.4TB, 12.8TB 3.8TB, 7.68TB, 15.3TB		
Supported drives (QLC NVMe)		15.3TB, 30.7TB		
Block access protocol iSCSI NVMe/TCP	File access protocol NFS	Management console Web GUI SMTP SNMP Syslog		Support P IP

Storage controller



Storage expansion

(max 72 drives)

Up to three NVMe shelves

4 expansion slots for installation

4-port 10Gb Eth SFP+

2-port 10/25Gb Eth SFP28

2-port 40/100Gb Eth QSFP28

Functionality



NVMe/TCP

A new industry standard for superior speed and compatibility



App-on-Controller

The possibility of running isolated user applications directly on storage controllers



Snapshots

No impact on performance and independent of volume size



AutoSupport

Performance monitoring and AutoSupport alerts with 24/7 support



RAID-Z (1,2,3)

Providing redundancy without performance degradation disk failures



Inline-Deduplication Inline-Compression

Cost-effective real-time storage space utilization for SSD





Workload control and QoE prioritization



Thin Provisioning

High efficiency of space utilization and allocation



Included tech support3 yearsAdvanced service plan24x7 for 5 yearsReplacement of failed
componentsUp to Next Business Day

Remote Technical Support

Access to the self-service web portal 24 hours a day, 7 days a week

info@itpod.com